


DIAMOND WEAVE

Designed by Elise Lea for RK
www.robertkaufman.com

Featuring ARTISAN
BATIKS

Lively Garden
by Linn

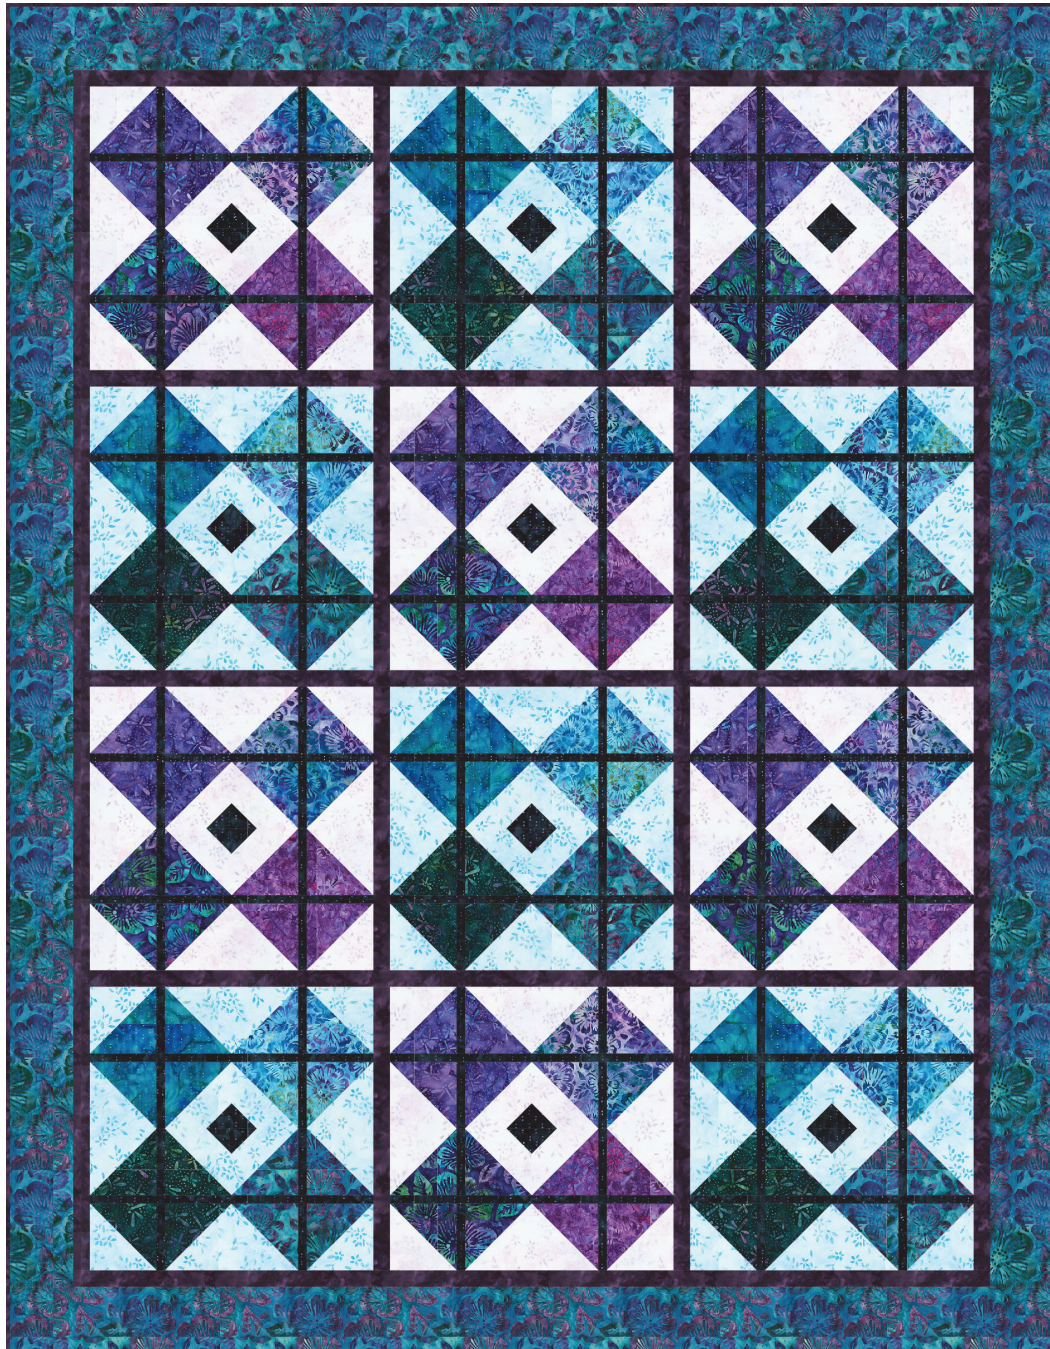

Finished quilt measures: 63" x 81"














Difficulty Rating: **Beginner**

ROBERTKAUFMAN
F A B R I C S

For questions about this pattern, please email Patterns@RobertKaufman.com.

Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

| Color | Fabric | Name/SKU | Yardage | Color | Fabric | Name/SKU | Yardage |
|---|--------|---------------------------|------------|--|----------|---|----------|
|  | A | AMD-19728-17 IRIS | 7/8 yard |  | H | AMD-19727-20 AMETHYST | 1/3 yard |
|  | B | AMD-19728-63 SKY | 7/8 yard |  | I | AMD-19727-238 GARDEN | 1/3 yard |
|  | C | AMD-7000-221 AUBERGINE | 2/3 yard |  | J | AMD-19730-213 TEAL | 1/3 yard |
|  | D | AMD-19730-6 PURPLE | 3/4 yard |  | K | AMD-19727-213 TEAL | 1/3 yard |
|  | E | AMD-19723-213 TEAL | 1-1/4 yard |  | L | AMD-19724-270 MEADOW | 1/3 yard |
|  | F | AMD-19724-220 PANSY | 1/3 yard |  | Binding* | AMD-7000-221 AUBERGINE <small>*Also used for Fabric C</small> | 5/8 yard |
|  | G | AMD-19723-220 PANSY | 1/3 yard | <p>You will also need: 5 yards for backing</p> | | | |

Copyright 2020, Robert Kaufman
For individual use only - Not for resale

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Instructions

From each of Fabrics A and B, cut:

six 5" x WOF strips. Subcut:
forty-eight 5" squares for the HSTs

From Fabric C, cut:

fourteen 1-1/2" x WOF strips. Sew together, end-to-end, then trim:
two 1-1/2" x 71-1/2" side inner borders
two 1-1/2" x 55-1/2" top/bottom inner borders
three 1-1/2" x 53-1/2" row sashing strips
eight 1-1/2" x 17-1/2" block sashing strips

From Fabric D, cut:

twenty-six 1" x WOF strips. Subcut:
twenty-four 1" x 17-1/2" strips
ninety-six 1" x 4-1/2" rectangles
forty-eight 2" squares. Mark a diagonal on the back of each square.

From Fabric E, cut:

seven 4-1/2" x WOF strips. Sew together, end-to-end, then trim:
two 4-1/2" x 73-1/2" side outer borders
two 4-1/2" x 63-1/2" top/bottom outer borders
two 5" x WOF strips. Subcut:
twelve 5" squares for the HSTs

From each of Fabrics F-L, cut:

two 5" x WOF strips. Subcut:
twelve 5" squares for the HSTs

From the Binding Fabric, cut:

eight 2-1/2" x WOF strips

Assemble the Half-Square Triangles (HSTs)


Step 1: Pair a 5" Fabric A square with a 5" Fabric F square, RST. Mark a diagonal line on the wrong side of one square. Sew 1/4" away from both sides of the marked line. Cut on the marked line, creating two half-square triangles (HSTs). Press toward the darker fabric. Trim to 4-1/2" square. Repeat to make twenty-four A/F HSTs.



Step 2: Repeat Step 2 to make:



twenty-four A/G HSTs




twenty-four A/H HSTs



twenty-four A/I HSTs



twenty-four B/E HSTs



twenty-four B/J HSTs



twenty-four B/K HSTs




twenty-four B/L HSTs

Assemble the Stitch and Flip Units


Step 3: Place a 2" Fabric D square in the Fabric A corner of an A/F HST, right sides together. Note the orientation of the marked diagonal line. Sew on the marked line, then trim away the excess fabric, leaving a 1/4" seam allowance. Press.



Step 4: Using six of each HST combination from Step 2, repeat Step 3 to make a total of six stitch and flip units in each of the HST color combinations.

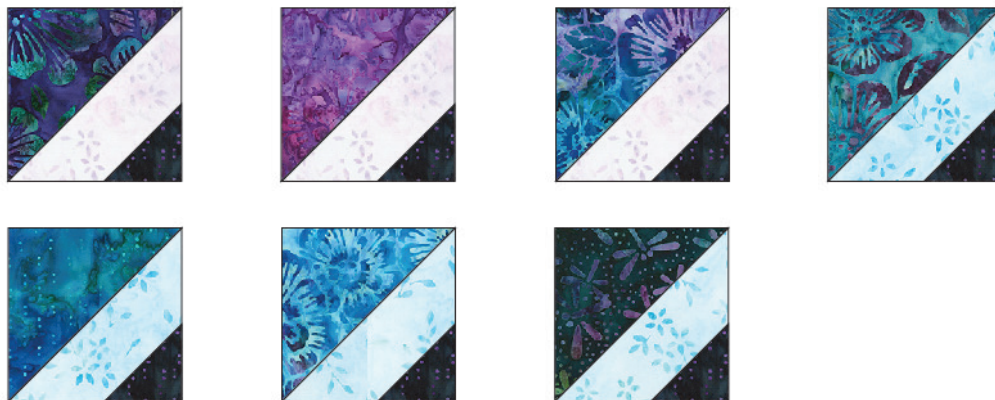

Assemble the A Blocks

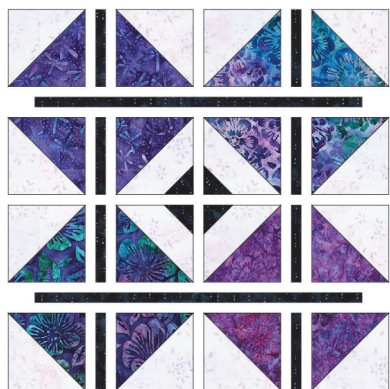

Step 5: Gather:

- three A/F HSTs
- one A/F HST with a Fabric D corner
- three A/I HSTs
- one A/I HST with a Fabric D corner
- three A/G HSTs
- one A/G HST with a Fabric D corner
- three A/H HSTs
- one A/H HST with a Fabric D corner
- eight 1" x 4-1/2" Fabric C strips
- two 1" x 17-1/2" Fabric D strips


Arrange as shown, following the Block Assembly Diagram.

Step 6: Sew a 1" x 4-1/2" Fabric D strip between each pair of HSTs. Press toward the strip.

Step 7: Sew the HST units together to form the rows. Press the seams open or to one side.


Step 8: Sew the rows together, sewing the 1" x 17-1/2" Fabric D strips between Rows 1/2 and Rows 3/4.

The finished A Block should measure 17-1/2" square. Make six A Blocks.




Assemble the B Blocks

Step 9: Using the process in Steps 5-8, and the fabrics shown in the B Block diagram, make six B Blocks, each measuring 17-1/2" square.

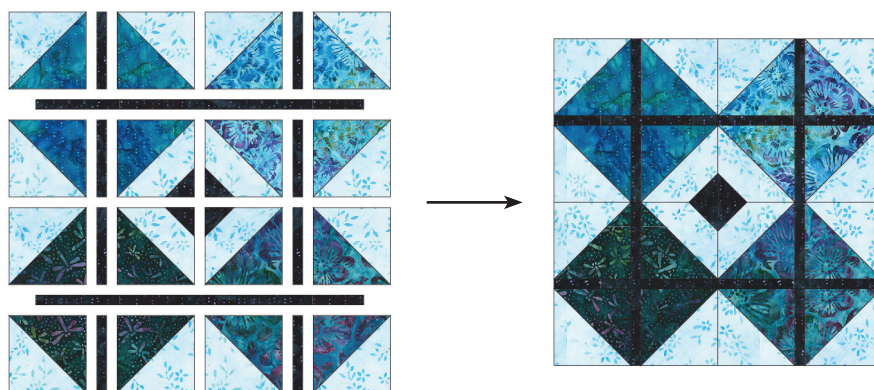

Assemble the Quilt

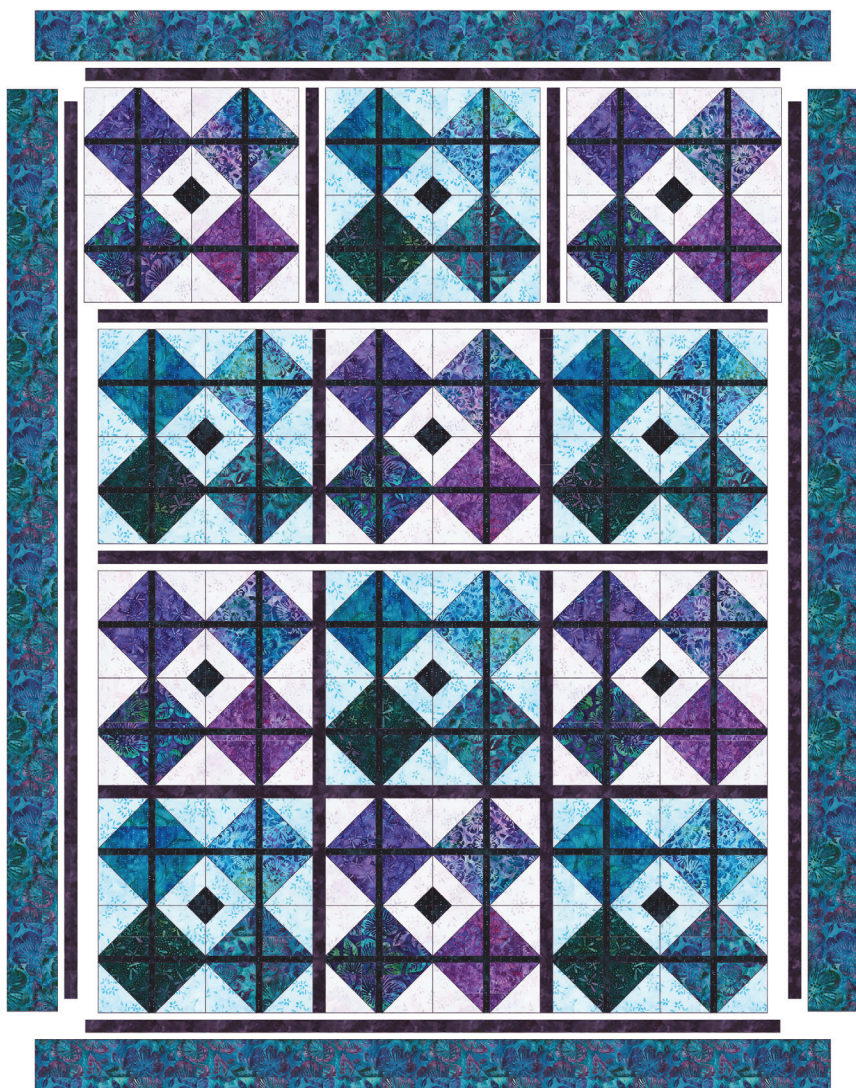

Step 10: Arrange the A and B Blocks together as indicated in the Quilt Assembly Diagram. Sew each row together, using sashing strips between each block. Press seams toward the sashing. Repeat to make four block rows.

Step 11: Sew the row sashing and block rows together. Press seams open or to the sashing.

Step 12: Sew the side inner borders to the sides of the quilt center. Press toward the borders. Sew the top and bottom inner borders to the quilt center. Press toward the borders.

Step 13: Sew the side outer borders to the sides of the quilt center. Press toward the borders. Sew the top and bottom outer borders to the quilt center. Press toward the borders.

Your quilt top is complete! Baste, quilt, bind and enjoy!